


OneFlat M blau

Light weight flat hose with a PVC double layer and woven polyester yarn inlay

Applications	waste water, construction machines, construction drying, irrigation, cable protection
Structure	PVC, blue, opaque
Temperature	-20°C up to 65°C
Properties	heavy-duty, crush-resistant, can be driven over, high pressure resistance, smooth inside, smooth outside

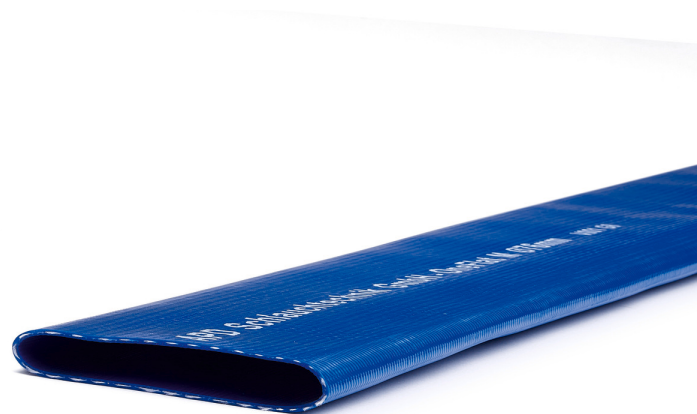

Inner Diameter (mm)	Max. Operating Pressure (bar)	Burst Pressure (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	8,00	24,00	0,17000	8,50	50	720190500
25	8,00	24,00	0,22000	11,00	50	720250500
32	8,00	24,00	0,24000	12,00	50	720320500
32	8,00	24,00	0,24000	24,00	100	720321000
38	8,00	24,00	0,29000	14,50	50	720380500
38	8,00	24,00	0,29000	29,00	100	720381000
51	8,00	24,00	0,32000	16,00	50	720500500
51	8,00	24,00	0,32000	32,00	100	720501000
63	8,00	24,00	0,36000	18,00	50	720630500
76	8,00	24,00	0,36000	18,00	50	720750500
90	8,00	24,00	0,52000	26,00	50	720900500
102	6,00	18,00	0,66000	33,00	50	721000500
102	6,00	18,00	0,86000	86,00	100	721001000
110	6,00	18,00	1,15000	57,50	50	721100500
110	6,00	18,00	1,15000	115,00	100	721101000
125	6,00	18,00	1,20000	60,00	50	721250500
125	6,00	18,00	1,20000	120,00	100	721251000
152	4,00	12,00	1,25000	62,50	50	721500500
152	4,00	12,00	1,25000	125,00	100	721501000
203	4,00	12,00	2,00000	100,00	50	722000500
203	4,00	12,00	2,00000	200,00	100	722001000