


## FLEXACIER LT LACTIC

<b>Applications</b>	feed conveying, beverage production & conveying, agriculture, food production & -conveying, milk- & cheese production
<b>Structure</b>	PVC / soft PVC, transparent, steel wire / stainless steel wire
<b>Temperature</b>	-15°C up to 65°C
<b>Properties</b>	Lebensmittelherstellung und -förderung, Transport von Milch, Getränkeherstellung und -förderung, Bewässerung, Landwirtschaft
<b>Norms</b>	material according to Food EU Directive (EC) No. 1935/2004 & Regulation (EC) No. 10/2011 for A, B, C, D1

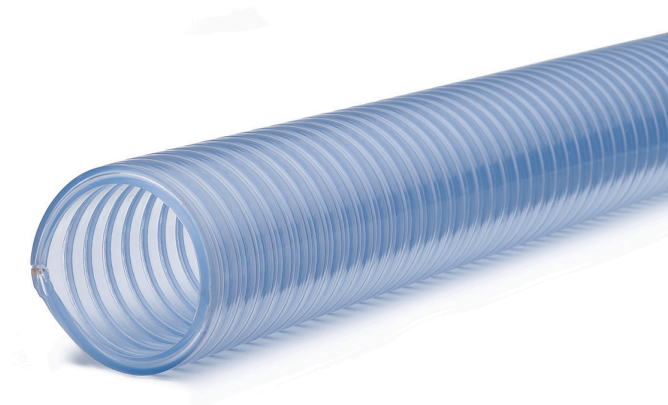

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Weight (kg/m)	Total Weight per Piece (kg)	Length (m)	Article Number
19	25,00	3,00	35	8,00	0,88	0,31000	6,20	20	2860190200
25	33,00	4,00	42	8,00	0,88	0,50000	10,00	20	2860250200
30	38,00	4,00	50	6,00	0,88	0,60000	12,00	20	2860300200
32	41,00	4,50	53	6,00	0,88	0,65000	13,00	20	2860320200
40	50,00	5,00	75	5,00	0,83	0,87000	17,40	20	2860400200
51	61,70	5,40	100	4,00	0,78	1,20000	26,00	20	2860510200